



EverLoc™ Aztec Patterns

2 Course

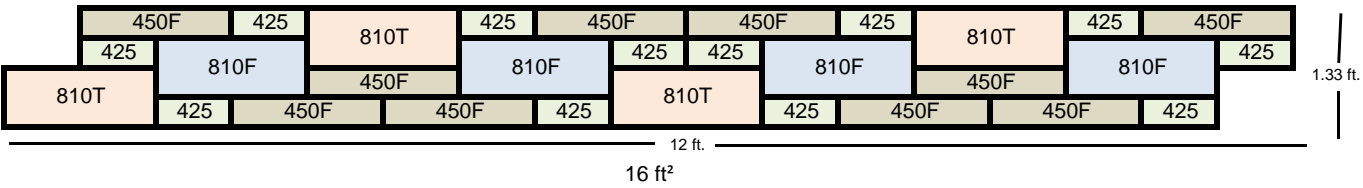


| Item | Qty. |
|-------|------|
| 810 T | 4 |
| 810 F | 4 |
| 450 F | 10 |
| 425 T | 12 |

3 Course

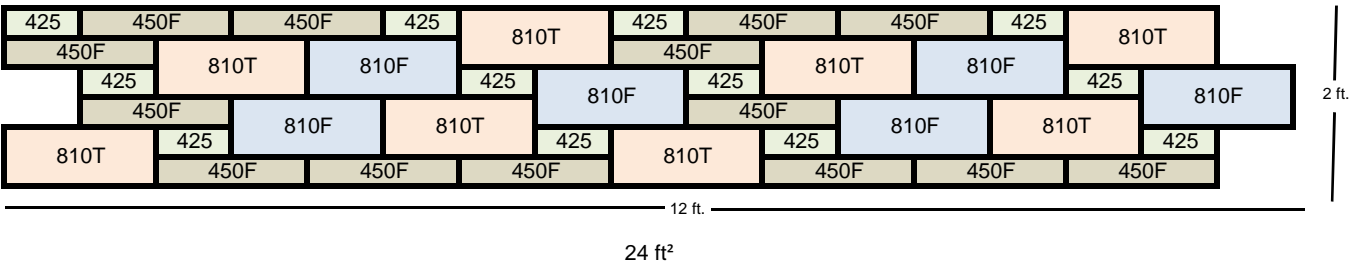

| Item | Qty. |
|-------|------|
| 810 T | 8 |
| 810 F | 6 |
| 450 F | 14 |
| 425 T | 12 |

4 Course

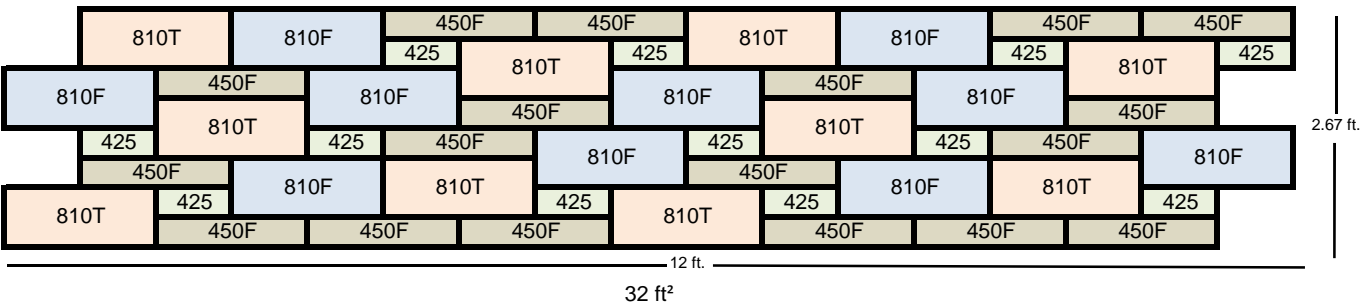

| Item | Qty. |
|-------|------|
| 810 T | 10 |
| 810 F | 10 |
| 450 F | 18 |
| 425 T | 12 |

The two course pattern is recommended for curved walls. This reduces the amount of push or runout due to setback of each course.

Consult a Civil Engineer for walls requiring geogrid fabric for placement and pattern type.